

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

This Page Blank (uspto)


PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04J 13/00	A1	(11) International Publication Number: WO 96/02097 (43) International Publication Date: 25 January 1996 (25.01.96)
(21) International Application Number: PCT/US95/08660 (22) International Filing Date: 10 July 1995 (10.07.95) (30) Priority Data: 272,484 11 July 1994 (11.07.94) US (71) Applicant: QUALCOMM INCORPORATED [US/US]; 6455 Lusk Boulevard, San Diego, CA 92121 (US). (72) Inventors: GILHOUSEN, Klein, S.; 6474 Jackson Creek Road, Bozeman, MT 59715 (US). WHEATLEY, Charles, E., III; 2208 Caminito Del Barco, Del Mar, CA 92014 (US). LEVIN, Jeffrey, A.; 12549 Maestro Court, San Diego, CA 92130 (US). (74) Agent: MILLER, Russell, B.; Qualcomm Incorporated, 6455 Lusk Boulevard, San Diego, CA 92121 (US).	(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: REVERSE LINK, CLOSED LOOP POWER CONTROL IN A CODE DIVISION MULTIPLE ACCESS SYSTEM**(57) Abstract**

The process of the present invention enables a mobile radiotelephone to operate at a 100 % duty cycle while providing closed loop power control. The base station measures the signal to noise ratio of the signal from the mobile and compares (305) that SNR with the SNR threshold values the base station has for each data rate the mobile is capable of transmitting. The base station then generates power control commands (310) to instruct the mobile to change its power depending on the outcome of the comparisons.

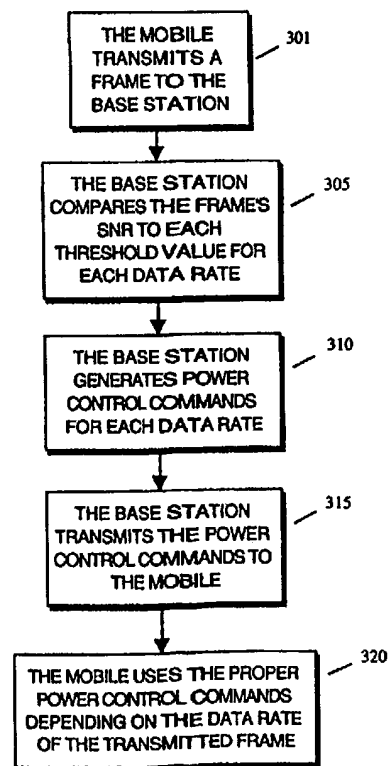

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

REVERSE LINK, CLOSED LOOP POWER CONTROL IN A CODE DIVISION MULTIPLE ACCESS SYSTEM

BACKGROUND OF THE INVENTION

5

I. FIELD OF THE INVENTION

The present invention relates generally to radiotelephone communications. More particularly, the present invention relates to reverse
10 link power control in a radiotelephone system.

II. DESCRIPTION OF THE RELATED ART

The Federal Communications Commission (FCC) governs the use
15 of the radio frequency (RF) spectrum, deciding which industry gets certain frequencies. Since the RF spectrum is limited, only a small portion of the spectrum can be assigned to each industry. The assigned spectrum, therefore, must be used efficiently in order to allow as many frequency users as possible to have access to the spectrum.

20 Multiple access modulation techniques are some of the most efficient techniques for utilizing the RF spectrum. Examples of such modulation techniques include time division multiple access (TDMA), frequency division multiple access (FDMA), and code division multiple access (CDMA).

25 CDMA modulation employs a spread spectrum technique for the transmission of information. A spread spectrum system uses a modulation technique that spreads the transmitted signal over a wide frequency band. This frequency band is typically substantially wider than the minimum bandwidth required to transmit the signal. The spread spectrum
30 technique is accomplished by modulating each baseband data signal to be transmitted with a unique wide band spreading code. Using this technique, a signal having a bandwidth of only a few kilohertz can be spread over a bandwidth of more than a megahertz. Typical examples of spread spectrum techniques can be found in *Spread Spectrum Communications*,
35 Volume i, M. K. Simon, Chap. 5, pp. 262-358.

A form of frequency diversity is obtained by spreading the transmitted signal over a wide frequency range. Since only 200-300 kHz of a signal is typically affected by a frequency selective fade, the remaining spectrum of the transmitted signal is unaffected. A receiver that receives the spread
40 spectrum signal, therefore, will be affected less by the fade condition.

In a CDMA-type radiotelephone system, multiple signals are transmitted simultaneously at the same frequency. Such a CDMA system is disclosed in U.S. Patent No. 4,901,307 to Gilhousen et al. and assigned to Qualcomm, Inc. In this type system, a particular receiver determines
5 which signal is intended for that receiver by the unique spreading code in the signal. The signals at that frequency without the particular spreading code intended for that particular receiver appear to be noise to that receiver and are ignored.

FIG. 1 shows a typical prior art CDMA transmitter for use on the
10 reverse channel of a radiotelephone system, the reverse channel being the link from the mobile to the base station. A digital baseband signal is first generated by a vocoder (voice encoder/decoder). The vocoder (100) digitizes an analog voice or data signal using an encoding process such as the Code Excited Linear Prediction (CELP) process that is well known in the art.

15 The digital baseband signal is input to a convolutional encoder (101) at a particular rate, such as 9600 bps. The encoder (101) convolutionally encodes the input data bits into data symbols at a fixed encoding rate. For example, the encoder (101) could encode the data bits at a fixed encoding rate of one data bit to three data symbols such that the encoder (101) outputs
20 data symbols at a 28.8 ksym/s rate with a 9600 bps input rate.

The data symbols from the encoder are input to an interleaver (102). The interleaver (102) scrambles the symbols such that any symbols lost over the channel won't be contiguous symbols. Therefore, if more than one symbol is lost in the communications channel, the error correcting code is
25 able to recover the information. The data symbols are input into the interleaver (102) in a column by column matrix and output from the matrix row by row. The interleaving takes place at the same 28.8 ksym/s data symbol rate that the data symbols were input.

The interleaved data symbols are input to a modulator (104). The
30 modulator (104) derives a sequence of fixed length Walsh symbols from the interleaved data symbols. In 64-ary orthogonal code signaling, the interleaved data symbols are grouped into sets of six to select one out of the 64 orthogonal codes to represent the set of six data symbols. These 64 orthogonal codes correspond to Walsh symbols from a 64 by 64 Hadamard
35 matrix wherein a Walsh symbol is a single row or column of the matrix. The modulator outputs a sequence of Walsh symbols, corresponding to the input data symbols at a fixed symbol rate, to one input of an XOR combiner

(107). The set of six grouped Walsh symbols has a length of 1.25 milliseconds (ms) and is typically referred to as a power control group.

A pseudo random noise (PN) generator (103) uses a long PN sequence to generate a user specific sequence of symbols. In a mobile radiotelephone having an electronic serial number (ESN), the ESN can be exclusive-ORed with the long PN sequence to generate the sequence, making the sequence specific to that radiotelephone user. The long PN generator (103) inputs and outputs data at the spreading rate of the system. The output of the PN generator (103) is coupled to the XOR combiner (107).

The Walsh code spread symbols from the combiner (107) are next spread in quadrature. The symbols are input to two XOR combiners (108 and 109) that generate a pair of short PN sequences. The first combiner (108) XORs the Walsh code spread symbols with the in-phase (I) sequence (105) while the second combiner (109) XORs the Walsh code spread symbols with the quadrature phase (Q) sequence (106).

The resulting I and Q channel code spread sequences are used to biphasic modulate a quadrature pair of sinusoids by driving the power level of the pair of sinusoids. The sinusoidal output signals are then summed, bandpass filtered, translated to an RF frequency, amplified, filtered, and radiated by an antenna.

The typical prior art CDMA transmitter used on the forward channel of a radiotelephone system, the link from the base station to the mobile, is similar to the reverse channel. This transmitter is illustrated in FIG. 2. The difference between the forward and reverse channel transmitters is the addition of a Walsh code generator (201) and power control bit multiplexer (220) between the PN generator combiner (103) and the quadrature spreading combiners (108 and 109) for the forward channel transmitter.

The power control bit multiplexer (220) multiplexes a power control bit in place of another bit in the frame. The mobile knows the location of this bit and looks for this power control bit at that location. As an example, a "0" bit instructs the mobile to increase its mean output power level a predetermined amount and a "1" bit instructs the mobile to decrease its mean output level a predetermined amount.

The code division channel selection generator (201) is coupled to a combiner (202) and provides a particular Walsh symbol to the combiner (202). The generator (201) provides one of 64 orthogonal codes corresponding to 64 Walsh symbols from a 64 by 64 Hadamard matrix wherein a Walsh symbol is a single row or column of the matrix. The combiner (202)

uses the particular Walsh code input by the code division channel generator (201) to spread the input scrambled data symbols into Walsh code spread data symbols. The Walsh code spread data symbols are output from the XOR combiner (202) and into the quadrature spreading combiners at a fixed
 5 chip rate of 1.2288 Mchp/s.

In the previously described system, as the mobile's transmission bit rate is reduced, it is desirable to reduce the average transmitter power accordingly. The mobile, therefore, reduces its transmit power, by reducing its transmitter duty cycle, as the data rate decreases. This
 10 permits the base station to measure the mobile's received signal to noise ratio (SNR) in each 1.25 ms. interval of six Walsh symbols, also known in the art as a power control group, and comparing this with a constant standard without the need to know the actual transmission rate being utilized in each data frame.

Each 20 ms. long data frame is comprised of 16 power control groups. Co-pending patent application U.S. Serial No. 07/822,164 to Padovani et al. and assigned to Qualcomm, Inc. recites a more detailed explanation of the 20 ms frames that are transmitted on the forward and reverse channels. The amount of data transmitted in each frame depends on the data rate.
 20 The frame composition for each data rate for the forward and reverse channels is illustrated in the following table:

Raw # bits	CRC	Trail	Rsrvd	Info bit	Rate
288	12	8	3	265	13250
144	10	8	2	124	6200
72	8	8	2	54	2700
36	6	8	2	20	1000

The rate listed in the table is the information bit rate. The reserved
 25 bits for the forward and reverse channels, in the preferred embodiment, are for signaling, power control, and future use.

During each power control group that the mobile is transmitting, it transmits at a power level determined by the power control system of the base station. The base station measures the received SNR of each received
 30 mobile signal during the 1.25 ms. power control interval and compares it to a target SNR established for that particular mobile. If the SNR exceeds the target SNR, a "turn down" command is transmitted from the base station to the mobile. Otherwise a "turn up" command is sent.

These power control commands are transmitted to the mobile by puncturing the data transmission with the power control bit. This puncturing replaces a data bit with the power control bit. The receiving mobile typically responds to a turn down command by reducing its transmitter power by 1 dB and increases its power by 1 dB in response to a turn up command.

The disadvantage of the above described power control scheme is that the mobile transmitter signal is pulsed on and off when transmitting at less than the maximum data rate. While the system performs adequately with this scheme, it may cause interference to other electronic systems, such as hearing aids. The European radiotelephone system, Global System for Mobile communications, uses this power control scheme and exhibits such behavior. There is a resulting need for a power control scheme that enables the mobile to operate using a 100% duty cycle while providing fast and accurate closed loop power control from the base station to the mobile.

SUMMARY OF THE INVENTION

The process of the present invention enables a radiotelephone's transmitter to operate at a 100% duty cycle. The transmitted power is varied according to the bit transmission rate used in each 20 ms data transmission frame so as to transmit a constant energy for each information bit. The base station, not knowing the transmission rate in advance, maintains a table of SNR threshold values for each possible data rate that the radiotelephone might use. The base station then compares the SNR of the received signal to the threshold values and generates a different power control command for each SNR versus SNR threshold comparison. The base station transmits these commands to the radiotelephone. The radiotelephone, knowing the rate at which the data was transmitted, chooses the power control command corresponding to that data rate.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows a block diagram of a typical prior art CDMA, reverse link transmitter for use in a radiotelephone system.

Fig. 2 shows a block diagram of a typical prior art CDMA, forward link transmitter for use in a radiotelephone system.

Fig. 3 shows a flowchart of the power control process of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

5 The process of the present invention provides power control of a mobile radiotelephone transmitter over the forward channel while allowing the mobile to transmit using a 100% duty cycle. This is accomplished by the mobile varying the transmit power for each frame according to the bit
10 transmission rate and the base station monitoring the SNR of the transmitted signals and instructing the mobile to change its power accordingly.

The closed loop power control process of the present invention, illustrated in the flowchart of Fig. 3, begins by the mobile transmitting a
15 signal (301) formatted into the frames of data described above. The transmitter is operating at a 100% duty cycle but varies the transmit power or each frame according to the frame's transmission rate.

In the preferred embodiment, the mobile has a variable rate vocoder that operates at 9600, 4800, 2400, and 1200 bits/second (bps). At the 4800 bps
20 rate, the mobile's transmitter power starts out at a power output that is reduced 3 dB from that used at the 9600 bps rate. The 2400 bps rate starts at a power output 6 dB less than the 9600 bps rate and the 1200 bps rate starts at a power output that is 9 dB less. These initial power settings are then varied in subsequent frames by the process of the present invention.

25 The base station cannot determine the data rate of a 20 ms data frame until well after the completion of the frame due to the forward error detection and correction coding (FEC) used. Therefore, when the base station receives a data frame from the mobile, it compares (305) the frame's SNR with each of the SNR threshold values that the base station has stored
30 in a table. The base station has an SNR threshold value for each of the four different data rates used by the mobile in the preferred embodiment.

The base station next generates a power control command (310) for each of the four data rates depending on the comparison of the received frame's SNR and the SNR threshold value for that particular data rate.
35 As an example, if the SNR of the received frame is compared to the 9600 bps SNR threshold and is found to be too low for that data rate, the base station generates a power control command to instruct the mobile to increase its power output. The SNR of the received frame is then compared

to the base station's 4800, 2400, and 1200 bps SNR threshold values in turn and a different power control command generated for each.

In the preferred embodiment, the power control commands generated above take the form of a one or two bits in each power control group, depending on the data rate. These bits are located in the reserved bit location discussed above. A "1" in the proper bit position instructs the mobile to increase its output power while a "0" instructs the mobile to decrease its power. An alternate embodiment uses the "1" to instruct the mobile to decrease its power and the "0" to increase its power.

The power control commands are then transmitted by the base station to the mobile (315). Since the mobile knows which data rate it used in the frame transmitted to the base station, it knows which set of power control commands to use (320).

A detailed example of the power control process of the present invention as used in a mobile radiotelephone illustrates the operation of the process. The mobile transmitter modulation and coding scheme uses $\frac{1}{3}$ convolutional coding. The convolutional code symbols are blocked into groups of 6, each of which determines which one of 64 possible orthogonal sequences are to be transmitted. The orthogonal sequence symbols are further covered by long and short length pseudo-random sequence chips that quadrature phase modulate the sinusoidal carrier signal.

A data frame at the 9600 bps data rate contains 288 information bits, consisting of 265 user information bits, a 12 bit cyclic redundancy check code, and an 8 bit convolutional code tail. The information bits are encoded into 576 data symbols by the constraint length 9 convolutional encoder. These are then grouped into 96 transmission symbols, each consisting of 6 of the convolutionally encoded data symbols.

Each transmission symbol chooses one of 64 different orthogonal chip sequences using a Walsh code. Each Walsh code consists of 64 Walsh chips. The Walsh chips must therefore be transmitted at a Walsh chip rate of 307.2 kHz. Each Walsh chip is then covered by a 1.2288 MHz chip rate pseudo-noise (PN) sequence produced by the long code generator. The result of this covering is further covered by each of two PN sequences produced by the short code generator.

The two resulting chip stream sequences control a quadrature phase modulation process of a sinusoidal carrier signal. The short code generator produces a length 32768 chip sequence. This generator is synchronized to the same length sequence received by the mobile from the base station. The synchronization process takes into account the fact that dif-

ferent base stations use different phases of the short PN code so that the mobile short code is synchronized in all mobiles regardless of with which base station they are communicating. The long code generator produces a sequence that is 4,398,046,511,103 chips in duration. The synchronization of this sequence is adjusted corresponding to the particular address being used by the mobile.

When the base station receives the signal from the mobile station, the base station generates the long and short code PN chip sequences that correspond to the codes assigned to the mobile. The received signal and the chip codes are combined in a correlator circuit. The correlator result, at a rate of 307.2 kHz that corresponds to the Walsh chip rate, is operated on by a fast Hadamard transform (FHT) circuit. This circuit sums the received Walsh chips in a manner corresponding to each of the possible Walsh codes that might have been transmitted by the mobile station.

The base station has multiple correlators and multiple receive antennas to allow multipath and antenna diversity to be obtained. The outputs of the multiple correlators and FHT circuits are combined in a diversity combiner circuit. Groups of six such FHT combined results are processed to obtain the received SNR measurement for the 9600 bps data rate. This can be done by summing the energy of the best of 64 outputs from each FHT process over the 6 Walsh symbols. This results in the power control group SNR measurement for 9600 bps. The 9600 bps received SNR is compared against the upper and lower 9600 bps target SNR values. In addition to power control group summing of power measurements, the diversity combiner outputs are decoded using a Viterbi algorithm decoder to recover the transmitted bits. If the CRC check passes, the receiving and decoding process is finished and the results are passed onto the vocoder or other service option processor. If the CRC does not pass, the processing continues at the lower data rates.

The comparison results are logically combined with the results of the comparisons for the lower data rates to determine the power control bits to be transmitted during each 1.25 ms power control group. If the received SNR exceeds the upper SNR target then both power control bits sent to the mobile in each 1.25 ms power control group are forced to be "turn down" commands. If the received SNR falls in between the upper and lower SNR thresholds, the first control bit corresponds to a "turn down" and the second bit corresponds to a "turn up" command. If the received SNR is below the lower SNR threshold, the first control bit is a "turn up"

command and the second control bit is determined by the comparisons using the appropriate lower rate threshold.

If the mobile was transmitting a 9600 bps data frame and was not in the soft hand-off mode, then the mobile will increase transmitter power by 1 dB if the first control bit is a turn up command. If the first control bit is a "turn down" command, the mobile reduces transmitter power by 1 dB if the second power control command bit is also a "turn down" command. If a "down-up" command is received, the mobile does not change the transmitter power.

If the mobile is in a soft hand-off mode, transmitting a 9600 data frame, then power control commands are received from two or more base stations at the same time. The general rule for combining the control commands from multiple base stations is that power is turned up only if all received power control commands agree to turn up the power. Power will be turned down if any of the power control signals instruct the mobile to "turn down". Power will be unchanged if all but one base station command "turn up" and one commands "no change".

A data frame at the 4800 bps data rate contains 144 information bits consisting of 124 user information bits, a 10 bit CRC, and an 8 bit convolutional code tail. The 144 information bits are encoded into 288 data symbols by the constraint length 9 convolutional encoder. These are then grouped into 48 transmission symbols, each symbol consisting of 6 of the convolutionally encoded data symbols. Each transmission symbol chooses one of 64 different orthogonal chip sequences using a Walsh code. Each of the 48 symbols is repeated twice, resulting in 96 symbols as for the 9600 bps transmission rate. The result is covered with the PN chip sequences as before for 9600 bps.

The base station receives the signal from the mobile station as follows. The signals are correlated with the chip codes and processed by the FHT circuits as for 9600 bps. The repeated pairs of orthogonal symbols are combined, the combined with other correlator and antenna signals decoded by the Viterbi algorithm and the 8 bit CRC checked. If the CRC checks properly, the results are delivered to the vocoder or other service option processor.

The first power control group interval (1.25 ms) of the data frame contains six orthogonal symbols consisting of three different symbols each repeated twice. These are combined and compared with the half interval 4800 bps SNR threshold. The comparison result determines the second bit

of the first power control group bit pair unless it is forced by the above logic into the up state.

During the second and third power control group, as well as the fourth and fifth, the sixth and seventh, etc., six orthogonal symbols are summed together for power control purposes. These are compared with the full interval 4800 bps SNR threshold. The comparison result determines the second bit of the third, fifth, seventh, etc. power control group bit pair unless forced by the "no change" command.

For the 4800 bps rate, the power control commands are contained in the second bit of the odd numbered power control groups. During even numbered power control groups, when transmitting 4800 bps, no power control is received. If the mobile was transmitting a 4800 bps data frame and was not in the soft hand-off mode, then the mobile will increase transmitter power by 1 dB if the second control bit is a "turn up" command. If the second control bit is a "turn down" command, the mobile will reduce transmitter power by 1 dB if the first power control command bit is not a "turn down" command. If a "down-up" command is received, the mobile will not change the transmitter power, assuming that one or the other two bits is received in error.

A data frame at the 2400 bps data rate contains 72 information bits consisting of 54 user information bits and an 8 bit convolutional code tail. The 48 information bits are encoded into 144 data symbols by the constraint length 9 convolutional encoder. These are then grouped into 24 transmission symbols, each consisting of 6 of the convolutionally encoded data symbols. Each of the 24 symbols is repeated four times, resulting in 96 symbols as for the 9600 bps transmission rate. Each transmission symbol chooses one of 64 different orthogonal chip sequences using a Walsh code and covered with the PN chip sequences as before for 9600 bps.

The base station receives the signal from the mobile station by correlating the received signals with the chip codes and processed by the FHT circuits as in the 9600 bps case. The repeated groups of four orthogonal symbols are combined, then combined with other correlator and antenna signals, and decoded by the Viterbi algorithm. If the decoder indicates an adequate received metric level, the results are delivered to the vocoder or other service option processor.

The first and second power control group intervals of the data frame contains 12 orthogonal symbols. Each symbol is the result of a four times repeat. Twelve successive orthogonal symbols can be combined as in the 9600 bps rate to form the received SNR measurement even though

groups of four are combined for data demodulation. The SNR measurement is compared with the half interval 2400 bps SNR threshold. The comparison result determines the second bit of the second power control group bit pair unless it is forced by the above logic into the up state.

5 The third, fourth, fifth, and sixth power control groups are combined as above and compared with the full interval SNR target threshold. Likewise, for the seventh through the tenth and the eleventh through the fourteenth power control groups. The power control commands are contained in the second bit for the second, sixth, tenth, and fourteenth
10 power control groups.

 If the mobile was transmitting a 2400 bps data frame and was not in the soft hand-off mode, then the mobile increases transmitter power by 1 dB if an appropriate power control bit is a "turn up" command. If a power control bit is a "turn down" command, the mobile will reduce transmitter
15 power by 1 dB. If a "down-up" command is received, the mobile will not change the transmitter power, assuming that one or the other of the two bits is received in error.

 A data frame at the 1200 bps data rate contains 36 information bits consisting of 20 user information bits and an 8 bit convolutional code tail.
20 The 36 informational bits are encoded into 72 data symbols by the constraint length 9 convolutional encoder. These are then grouped into 12 transmission symbols, each consisting of 6 of the convolutionally encoded data symbols. Each of the 12 symbols is repeated eight times, resulting in 96 symbols as for the 9600 bps transmission rate. Each transmission symbol
25 chooses one of the 64 different orthogonal chip sequences using a Walsh code and covered with the PN chip sequences.

 The base station receives the signal from the mobile by correlating the received signals with the chip codes and processed by the FHT circuits. The repeated groups of eight orthogonal symbols are combined, then
30 combined with other correlator and antenna signals, and decoded by the Viterbi algorithm. If the decoder indicates an adequate metric level, the results are delivered to the vocoder or other service option processor.

 The first four power control group intervals of the data frame contains 24 orthogonal symbols. Each symbol is the result of an eight times
35 repeat. Twenty-four successive orthogonal symbols are combined to form the received SNR measurement while groups of eight are combined for data demodulation. The SNR measurement is compared with the 1200 bps SNR threshold. The comparison result determines the second bit of the fourth power control group unless it is forced by the above logic into the up

state. Likewise, for the fifth through the eighth, the ninth through the twelfth and the thirteenth through the sixteenth power control groups.

If the mobile was transmitting a 1200 bps data frame and was not in the soft hand-off mode, then the mobile will increase transmitter power by 1 dB if an appropriate power control bit is a turn up command. If a power control bit is a "turn down" command, the mobile will reduce transmitter power by 1 dB. If a "down-up" command is received, the mobile will not change the transmitter power, assuming that one or the other of the two bits is received in error.

When the data rate changes from one data frame to the next, the transmitter power is changed to the corresponding level at the beginning of the data frame. All power control commands and adjustments are with respect to the nominal power used at each transmit data rate.

The SNR thresholds can also be changed dynamically by the mobile switching center that is connected to the base station. The mobile switching center connects the base station to the public switched telephone network (PSTN) and provides the switching functions required to pass data between the PSTN and the base station. If the base station is receiving from the mobile a signal that has a higher bit error rate than normal, the mobile switching center instructs the base station to increase the SNR threshold in the table for that mobile at that particular data rate.

In an alternate embodiment, the four power control commands are encoded in three bits of the frame. For example, the four threshold values define five possible SNR comparison outcomes. The first power control bit determines whether the received SNR exceeds the target level for 9.6 kbps. The remaining two bits use a binary encoding to indicate to which of the four lower levels the received SNR correlates.

In another embodiment, only two bits are used to control the mobile's transmitter power. This is accomplished by time sharing one of the bits between three of the thresholds. In this alternate embodiment, the first of two power control bits in each power control group are defined as in the preferred embodiment, i.e., transmit a "turn up" command if the received SNR exceeds the target SNR for 9.6 kbps and a "turn down" command otherwise.

In this alternate embodiment, the second of the two power control bits are time shared by every other bit signifying whether or not the received SNR exceeds target SNR for 4.8 kbps. The even numbered power control bits would alternately signify whether or not the received SNR exceeds the target SNR threshold for the 2400 and 1200 bps data rates. For

example, in the sixteen power control groups of a data frame, the first, third, fifth, seventh, ninth, eleventh, thirteenth, and fifteenth would transmit a bit determined by whether or not the received SNR exceeds the SNR threshold for the 4800 bps data rate. The second, sixth, tenth, and
5 fourteenth bits transmit a bit determined by whether or not the received SNR exceeds the SNR threshold for the 2400 bps data rate. The fourth, eighth, twelfth, and sixteenth bits transmit a bit determined by whether or not the received SNR exceeds the SNR threshold for the 1200 bps data rate.

In this alternate embodiment, the mobile, knowing the bit
10 transmission rate it used to transmit the frame, interprets the received power control commands accordingly. For example, during transmission of a 9600 bps data frame, the second power control bit in each pair is ignored. During transmission of a 4800 bps data frame, the mobile ignores the first of each pair of bits in each power control group and obeys the
15 second bit of the odd numbered pairs. The operation is similar for the 2400 and 1200 bps data rate cases.

In yet another embodiment, the base station uses two SNR thresholds for the 9600 bps rate, one just slightly above the target SNR threshold and one set slightly below the target SNR threshold. Obviously, the received
20 SNR cannot be simultaneously above the threshold for 9600 bps and below the threshold for one of the three other data transmission rates. Due to the possibility of receiving the power control bits in error, the mobile could receive a pair of power control bits corresponding to such a situation. In this instance, the mobile should ignore this pair of bits since it is generally
25 not possible to determine which of the two bits in the pair is in error. This embodiment, therefore, enables the sending of a "no change" power control command for the 9600 bps data rate.

If the received SNR exceeds the higher threshold, a "turn up" command is sent in the first of the pair of control bits in a power control
30 group. If the received SNR is lower than the lower 9600 bps threshold, then a "turn down" command is sent.

The second bit of the power control group contains a "turn down" command unless the received SNR is lower than the appropriate threshold for a lower bit rate. If the received SNR falls between the upper
35 and lower thresholds for 9600 bps, a "turn down" command is sent in the first command bit and a "turn up" is sent in the second bit. The mobile assumes that an error occurred in reception of the power control bits or assumes that a "no change" is being sent. In either case, the mobile does not change its transmitted power in the subsequent power control group

time interval. This embodiment is useful in reducing the peak-to-peak fluctuation of mobile transmitter power when the power is adjusted very close to the target SNR. This reduces noise contributed by the mobile to other mobiles in communication with this particular base station.

5 In yet another alternate embodiment of the closed loop power control process of the present invention, a single power control bit is transmitted per power control group. In this embodiment, the odd numbered power control groups transmit a power control bit determined by the 9600 bps SNR threshold. Every other even power control group transmits a power control
10 bit determined by the 480 bps SNR threshold. The remaining even power control groups split between transmitting a bit determined by the 2400 bps SNR threshold and the 1200 bps threshold. For example, the first, third, fifth, seventh, ninth, eleventh, thirteenth, and fifteenth power control groups transmit a bit determined by the 9600 bps SNR threshold
15 comparison. The second, sixth, tenth, and fourteenth bits transmit a bit determined by the 4800 SNR threshold comparison. The fourth and twelfth bits transmit a bit determined by the 2400 bps SNR threshold comparison. The eighth and sixteenth bits transmit a bit determined by the 1200 bps SNR threshold comparison. This technique reduces the number of power
20 control bits transmitted on the base station to mobile link at the expense of reducing the rate of control bits by a factor of two, possibly resulting in greater error in closed loop power control in a high dynamic environment.

Still another embodiment of the closed loop power control process of the present invention relies on a predetermined pattern of thresholds,
25 corresponding to different possible data rates. This process starts by the mobile or base station establishing the predetermined pattern of data rates. This pattern does not have to be evenly balanced but can be a function of expected data rates. A typical pattern looks like the following: 9600, 1200, 2400, 4800, and 14,400. This established data rate pattern is subsequently
30 referred to as the assumed data rate pattern.

The assumed data rate pattern is then made known to both the mobile and the base station at some point, such as at call set up. If the mobile initiated the assumed data rate pattern, the mobile communicates the pattern to the base station and vice versa.

35 Using the assumed data rate pattern, the base station demodulator applies different energy thresholds to each power control group of received energy in determining the proper power control decision for each power control group. A typical example of an energy level threshold for each

data rate is 9000 for 9600 bps, 6000 for 1200 bps, 3000 for 2400 bps, 1000 for 4800 bps, and 8000 for 14,400 bps.

The base station compares the energy of the incoming signal and guesses the data rate based on this energy level. For example, if the base station received a signal having an energy level of 5000, it would assume the data rate is 1200 bps since this is data rate associated with closest energy level stored in its table. The base station then sends a power control command to the mobile instructing it to increase power since at 1200 bps the base station expects to see an energy level of 6000.

The mobile decides how to use each power control command bit based on the value of the bit, the actual data rate used for the power control group, and the assumed data rate pattern that was used to compute the power control bit. The mobile knows which assumed data rate was used by the base station to create the power control decision by using the same procedure used by the base station: the data rate with the closest associated energy level.

The power control decision that the mobile uses to control its transmit power is determined by the following table:

	P.C. bit = UP	P.C. bit = DOWN
actual rate > assumed rate	increase power	ignore
actual rate = assumed rate	increase power	decrease power
actual rate < assumed rate	ignore	decrease power

This table states that if the power control bit that the mobile receives from the base station instructs the mobile to increase power and the actual data rate is greater than or equal to the assumed data rate, then the mobile increases its transmit power. But if the power control bit instructs a power increase and the actual data rate is less than the assumed data rate, the power control instruction is ignored by the mobile.

The above table also shows that if the actual rate is less than or equal to the assumed rate, the mobile will decrease power if the power control bit is received instructing the mobile to decrease power. If the actual rate is greater than the assumed rate, the power control command to decrease power is ignored.

A benefit of this alternate embodiment is that, depending on the error rate of the power control channel, soft decisions can be incorporated in the power control commands to change the step sizes of the power

increments and decrements. This is especially beneficial on weak decisions when the actual data rate and the assumed rate are far apart.

WE CLAIM:

CLAIMS

1. A method for controlling power of a transmitter in a mobile
2 communications device having a variable data transmission rate, the
transmitter communicating over a channel between the mobile
4 communications device and a base station, the base station having a data
table comprising a plurality of signal to noise ratio thresholds, the method
6 comprising the steps of:

the mobile communications device transmitting a signal to the base
8 station, the signal being transmitted at a predetermined data rate and
having a signal to noise ratio;

10 the base station comparing the signal to noise ratio to each of the
plurality of signal to noise ratio thresholds;

12 the base station generating at least one power control command in
response to the step of comparing;

14 the base station transmitting the at least one power control
command to the mobile communications device; and

16 the mobile communications device implementing a first power
control command of the at least one power control command.

2. A method for controlling power of a transmitter in a mobile
2 communications device having a plurality of data transmission rates, the
transmitter communicating signals over a channel between the mobile
4 communications device and a base station, each signal comprising a
plurality of power control groups, the base station having a data table
6 comprising a signal to noise ratio threshold for each of the plurality of
data transmission rates, the method comprising the steps of:

8 the mobile communications device transmitting a signal to the base
station at a first predetermined data transmission rate of the plurality of
10 data transmission rates, the signal having a signal to noise ratio;

the base station comparing the signal to noise ratio to each of the
12 plurality of signal to noise ratio thresholds;

the base station generating a power control command for each data
14 transmission rate in response to the step of comparing;

the base station transmitting each power control command to the
16 mobile communications device; and

the mobile communications device increasing or decreasing the
18 transmitter power in response to each received power control command
and the first predetermined data transmission rate.

3. The method of claim 2 wherein the plurality of data
2 transmission rates includes 9600, 4800, 2400, and 1200 kilobits/second.

4. The method of claim 2 wherein the mobile communications
2 device is a code division multiple access type radiotelephone and the base
station is a code division multiple access type base station.

5. The method of claim 2 wherein the power control groups are
2 organized into frames, each frame comprising 16 power control groups.

6. A method for controlling power of a transmitter in a mobile
2 communications device having a variable rate vocoder capable of
transmitting data signals at a plurality of predetermined data rates, the
4 transmitter communicating signals over a channel between the mobile
communications device and at least one base station, each signal
6 comprising a plurality of data frames and each data frame comprising a
plurality of power control groups, each of the at least one base stations
8 having a data table comprising a signal to noise ratio threshold for each of
the plurality of data transmission rates, the method comprising the steps
10 of:

the mobile communications device transmitting a signal to the base
12 station at a first predetermined data rate of the plurality of predetermined
data rates, the signal having a signal to noise ratio;

14 the base station comparing the signal to noise ratio to each of the
plurality of signal to noise ratio thresholds;

16 the base station generating a power control command in each
power control group in response to the step of comparing;

18 the base station transmitting each power control group to the mobile
communications device; and

20 the mobile communications device increasing or decreasing the
transmitter power in response to each received power control command
22 and the first predetermined data transmission rate.

7. A method for controlling power in a radio having a transmitter
2 with an output power and a variable rate vocoder capable of transmitting

signals at a plurality of predetermined data rates, the transmitter
4 transmitting signals to at least one base station over a reverse channel, the
at least one base station transmitting signals to the radio over a forward
6 channel, each signal comprising a plurality of data frames and each data
frame comprising a plurality of power control groups, the method
8 comprising the steps of:

establishing a predetermined set of data rates between the radio and
10 a first base station of the at least one base station, each data rate of the
predetermined set of data rates having an associated predetermined energy
12 threshold level;

generating a power control command in response to a first
14 predetermined data rate of the predetermined set of data rates and the first
data rate's associated predetermined energy threshold level;

16 transmitting the power control command to the radio over the
forward channel;

18 comparing the actual data rate to the first predetermined data rate;
and

20 the radio adjusting its output power in response to the power control
command and the step of comparing.

8. A method for controlling power in a radio having a transmitter
2 with an output power and a variable rate vocoder capable of transmitting
signals at a plurality of predetermined data rates, the transmitter
4 transmitting signals to at least one base station over a reverse channel, the
at least one base station transmitting signals to the radio over a forward
6 channel, each signal comprising a plurality of data frames and each data
frame comprising a plurality of power control groups, the method
8 comprising the steps of:

establishing a predetermined set of data rates between the radio and
10 a first base station of the at least one base station, each data rate of the
predetermined set of data rates having an associated predetermined energy
12 threshold level;

generating a transmitter power control command in response to a
14 first predetermined data rate of the predetermined set of data rates and the
first data rate's associated predetermined energy threshold level;


16 transmitting the transmitter power control command to the radio
over the forward channel;

18 comparing the actual data rate to the first predetermined data rate;

if the transmitter power control command indicates turning power
20 up and the actual data rate is greater than the first predetermined data
rate, increasing the output power;
22 if the transmitter power control command indicates turning power
down and the actual data rate is greater than the first predetermined data
24 rate, ignoring the transmitter power control command;
if the transmitter power control command indicates turning power
26 up and the actual data rate is less than the first predetermined data rate,
ignoring the transmitter power control command; and
28 if the transmitter power control command indicates turning the
power down and the actual data rate is less than the first predetermined
30 data rate, decreasing the output power.


9. A method for controlling power of a transmitter in a
2 communications device, the method comprising the steps of:
the communications device transmitting a signal having a signal to
4 noise ratio to a receiver device;
the receiver device comparing the signal to noise ratio to a signal to
6 noise ratio threshold; and
the receiver device generating a power control command in response
8 to the comparing step.

1/2

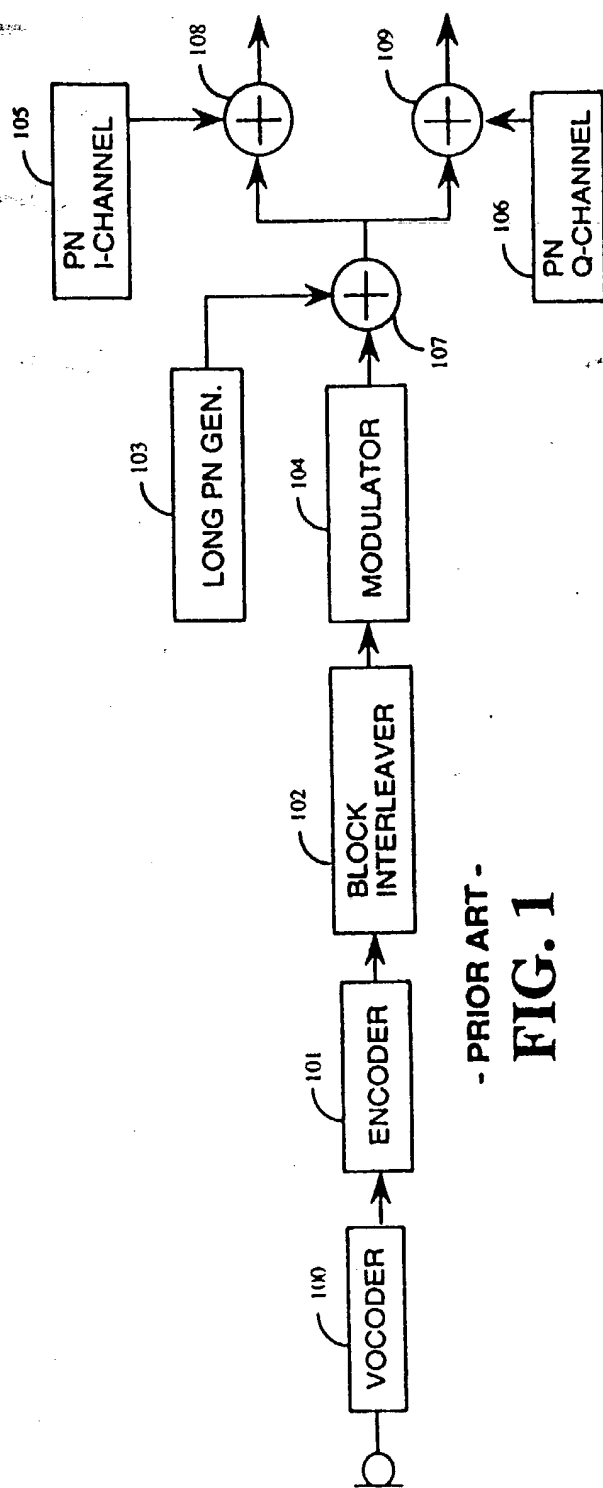

- PRIOR ART -

FIG. 1

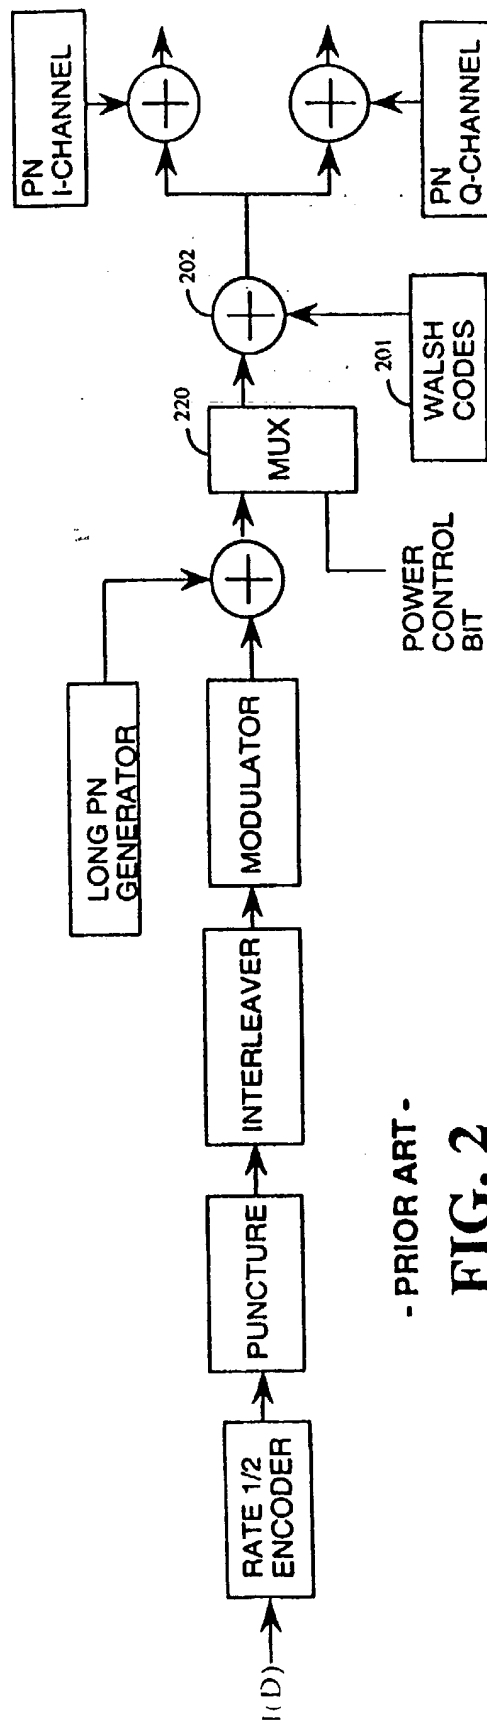

- PRIOR ART -

FIG. 2

2/2

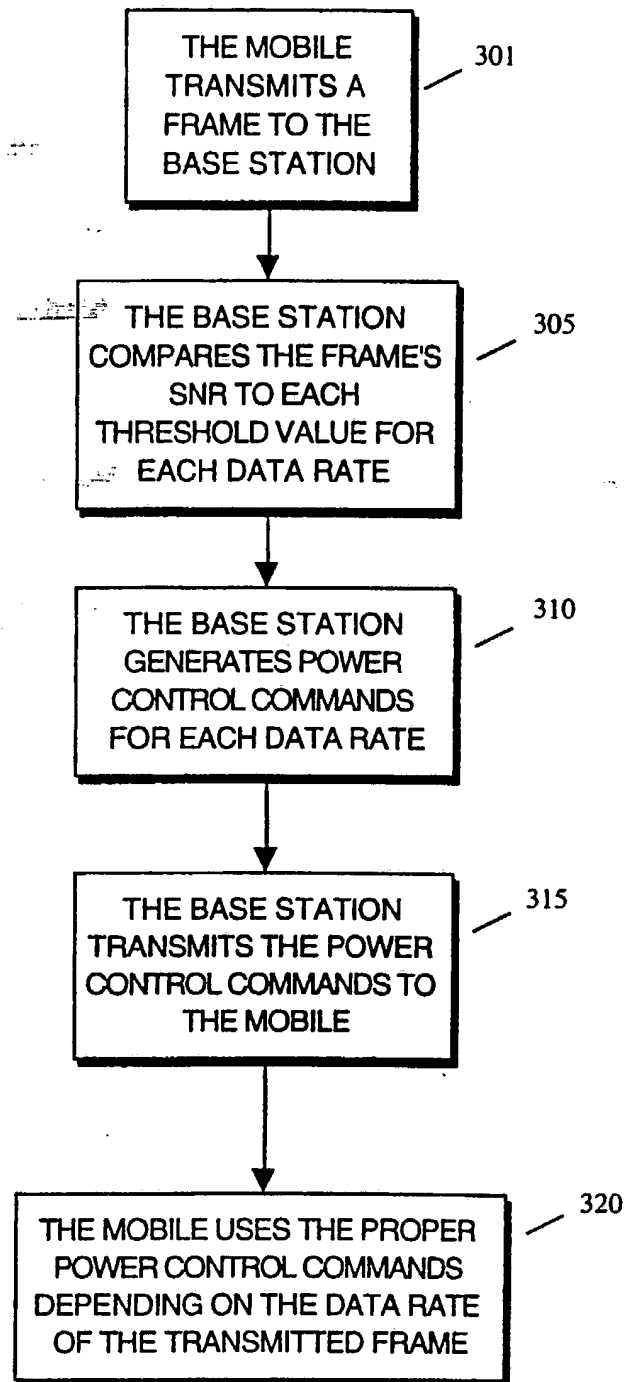


FIG. 3

INTERNATIONAL SEARCH REPORT

 Int. Application No
 PCT/US 95/08660

A. CLASSIFICATION OF SUBJECT MATTER

H 04 J 13/00

According to International Patent Classification (IPC) or to both national classification and IPC 6

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H 04 K, H 04 L, H 04 B, G 10 L, H 04 J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US, A, 5 245 629 (HALL) 14 September 1993 (14.09.93), fig. 1-6; abstract; column 1, line 60 - column 2, line 16; column 5, lines 7-47; claims 1,9-12,17.	1-4
A	fig. 1-6; abstract; claims.	5-9
X	US, A, 5 216 692 (LING) 01 June 1993 (01.06.93), fig. 1-3; abstract; column 5, line 35 - column 6, line 5; column 7, lines 26-56; column 7, line 64 - column 8, line 1.	1-4
A	fig. 1-3; abstract; claims.	5-9

☒ Further documents are listed in the continuation of box C.☐ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

25 October 1995

Date of mailing of the international search report

18.12.95

Name and mailing address of the ISA

 European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

WENNINGER e.h.

INTERNATIONAL SEARCH REPORT

Intern al Application No

PCT/US 95/08660

C.(Continuation)- DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO, A, 93/07 702 (QUALCOMM INCORPORATED) 15 April 1993 (15.04.93), fig. 1-4,6; abstract; page 10, line 3 - page 12, line 20; page 16, lines 4-28; page 20, line 17 - page 21, line 28.	1-4
A	fig. 1-4,6; abstract; page 10, line 3 - page 12, line 20; page 20, line 17 - page 21, line 28.	5-9
P,A	US, A, 5:383 219 (WHEATLEY) 17 January 1995 (17.01.95), fig. 1-3,5; abstract; column 1, line 55 - column 3, line 40; column 6, line 34 - column 8, line 32.	1-9
A	GB, A, 2 271 245 (ROKE MANOR RESEARCH) 06 April 1994 (06.04.94), fig. 1-3; abstract; page 1, line 11 - page 3, line 10; page 4, lines 13-17.	1-9
A	WO, A, 92/17 011 (MOTOROLA) 01 October 1992 (01.10.92), fig. 3,4; abstract; page 5, line 19 - page 6, line 2; page 10, line 1 - page 13, line 24.	1-9
A	WO, A, 92/22 891 (QUALCOMM INCORPORATED) 23 December 1992 (23.12.92), fig. 1-4; abstract; page 3, line 33 - page 8, line 2; claims.	6-8

ANHANG

zum internationalen Recherchen-
bericht über die internationale
Patentanmeldung Nr.

ANNEX

to the International Search
Report to the International Patent
Application No.

ANNEXE

au rapport de recherche inter-
national relatif à la demande de brevet
international n°

PCT/US 95/08660 SAE 113368

In diesem Anhang sind die Mitglieder
der Patentfamilien der im obenge-
nannten internationalen Recherchenbericht
angeführten Patentdokumente angegeben.
Diese Angaben dienen nur zur Unter-
richtung und erfolgen ohne Gewähr.

This Annex lists the patent family
members relating to the patent documents
cited in the above-mentioned inter-
national search report. The Office is
in no way liable for these particulars
which are given merely for the purpose
of information.

La présente annexe indique les
membres de la famille de brevets
relatifs aux documents de brevets cités
dans le rapport de recherche inter-
national visée ci-dessus. Les renseigne-
ments fournis sont donnés à titre indica-
tif et n'engagent pas la responsabilité
de l'Office.

Im Recherchenbericht angeführtes Patentdokument Patent document cited in search report Document de brevet cité dans le rapport de recherche	Datum der Veröffentlichung Publication date Date de publication	Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets	Datum der Veröffentlichung Publication date Date de publication
US A 5245629	14-09-93	CA AA 2098010 JP T2 6504179 WO A1 9309626	29-04-93 12-05-94 13-05-93
US A 5216692	01-06-93	CA AA 2102793 IL AO 105121 JP T2 6508254 WO A1 9320629	01-10-93 08-07-93 14-09-94 14-10-93
WO A1 9307702	15-04-93	US A 5267262 AU A1 3054379 AU B2 654891 BG A 98704 EP A1 607359 FI AO 941637 FI A 941637 HU AO 9400983 HU A2 69842 JP T2 7502631 MX A1 9205759 NO AO 941264 NO A 941264 ZA A 9207539 AU A1 6728379 AU B2 646001 BR A 9007826 CA AA 2072989 CN A 1052870 CN E 1023402 CN A 1090107 EP A1 500689 EP A4 500689 FI A 932083 FI AO 932083 IL AO 96218 JP T2 4502841 NO AO 9221792 NO A 9221792 US A 5056109 WO A1 9107037 ZA A 9008859 US A 5235728 US A 5265119	30-11-93 03-05-93 24-11-94 31-05-95 27-07-94 08-04-94 08-06-94 28-07-94 28-09-95 16-03-95 14-06-93 07-04-94 08-06-94 07-07-93 31-05-91 03-05-94 25-08-92 08-05-91 14-08-91 06-07-94 27-07-94 02-09-92 24-02-93 07-05-92 07-05-92 16-08-91 21-05-92 06-05-92 06-07-92 08-10-91 16-05-91 25-09-91 26-10-93 23-11-94
US A 5383219	17-01-95	AU A1 1187279 FI A 953501 FI AO 953501 IL AO 111689 WO A2 951503 WO A3 951503 US A 5461639	13-06-95 20-07-95 20-07-95 24-01-95 01-06-95 15-06-95 24-10-95

PCT/US 95/08660
(suite)

GB A1	2271245	06-04-94	CA	AA	2100816	31-03-94
			EP	A1	590252	06-04-94
			FI	A0	934276	29-09-93
			FI	A	934276	31-03-94
			GB	A0	9220579	11-11-92
WD A1	9217011	01-10-92	JF	A2	6204935	22-07-94
			US	A	5430889	04-07-95
			CA	AA	2077343	14-09-92
			EP	A1	529051	03-03-93
			EP	A4	529051	14-12-94
WD A1	9222891	23-12-92	IL	A0	101044	15-11-93
			IL	A1	101044	26-05-95
			JF	T2	5506763	20-09-94
			US	A	5204876	20-04-93
			AU	A1	21865792	12-01-93
WD A1	9222891	23-12-92	BR	A	9206146	03-01-95
			CN	A	1071036	14-04-93
			EP	A1	588932	30-03-94
			FI	A	935597	13-12-94
			FI	A0	935597	13-12-94
			JF	T2	6511320	15-12-94
			MX	A1	9202908	28-01-94
			NO	A	934544	10-12-94
			NO	A0	934544	10-12-94
			ZA	A	9204082	26-02-95
			US	A	5414796	09-05-95